

Casting Tool Design of a 150CC Cylinder Head

Srikanth Karumuri¹, Temam Kadire², Terefe Jima³, Veeranjaneyulu Itha⁴

^{1, 2, 3, 4}Mizan Tepi University, Department of Mechanical Engineering, Tepi Campus, Tepi, Ethiopia-121

Email address: sri1460[AT]gmail.com

Abstract— A cylinder head is made of box type of section of considerable depth to accommodate ports of air and gas passages, inlet valve, exhaust valve and spark plug. The studs or bolts are screwed up tightly along with a metal gasket or asbestos packing to provide a leak proof joint between the cylinder and cylinder head. The cylinder head is subjected to temperatures due to combustion in cylinder and pressure on surface.

In this paper a cylinder head is designed and modelled for the Pulser bike. Manufacturing processes for this is pressure die casting die. We designed the casting tool for the aluminium alloy because its thermal conductivity is more. Material used in casting is LM 6 blocks. This manufacturing process is done in the cold chamber Furnace. We have extracted core and cavity. Die design is prepared for the same. We are providing all manufacturing processes of all components of the die. We are also providing CNC programming for the core & cavity. Modelling, core-cavity extraction and die design is done by using Pro/Engineer software. Manufacturing process is done by using Pro/Engineer software.

I. INTRODUCTION TO CYLINDER HEAD

The cylinder head in I.C. engine is placed above cylinders and cylinder block. The combustion chamber is formed above the cylinder. In a flat head engine all the mechanical components are with a block. The cylinder head is basically a flat plate and it is fixed above the cylinder bank with gasket. The spark plugs, poppet valves and ports have come under the design of overhead valve (OHV) and overhead crankshaft (OHC).

The manufacturing and servicing is too simple. On accounts the manufacturing of engine is a great success in automobile industry. The fuel/air is flow through the inlet valve of cylinder head is called ports and exhaust gasses flow through the exhaust valves. In some engines (water – cooled engine) the cylinder head consists integral ducts and ports. In this engines water acts as a coolant and antifreeze, which provide to outside the excess heat.

Some engines has one cylinder head fixed in each cylinder which are used for power generation and heavy equipment in industries. These engines has medium and large capacity diesel engines. By this reduce the cost of servicing.

II. DIE CALCULATIONS OF CYLINDER HEAD

A. Tonnage Calculation

Projected area of one component (a) = 50173.2 mm²

Number of cavities (n) = 1

Projected area of Casting (A) = a x n = 50173.2 mm²

Area of slide:

Projected Area of Slide 1 = 13,599.5mm²

Wedge Angle(α) = 10 deg

Final Projected Area of slide 1 (A₁) = 13,599 x tan 10 = 2398 mm²

Projected Area of Slide 2 = 5312.93mm²

Wedge Angle (α) = 10 deg

Final Projected Area of slide 2 (A₂) = 5312.93 x tan 10 = 936 mm²

Projected area including overflows and feed system (A_F) = A x c/100 = 50173.2 x 40/100 = 20069.28 mm²

Total Projected area = A + A₁ + A₂ + A_F = 50173.2 + 2398 + 936 + 20069.28 = 73577 mm²

Specific Injection pressure = 800 kgf/cm²

= 800 x 10⁻² kgf/ mm²

Total force acting on the die plate (F) = Projected area x

Injection Pressure = 73577 x 8 kgf = 589T

Considering machine efficiency of 80%,

Locking tonnage required = F x 1.2 = 576 x 1.2 = 707T

Hence the locking tonnage we can select 800 T

B. Shot Weight Calculation

One component volume (v) = 9.10 x 105mm³

Total component volume (V) = v x n mm³ = 9.828 x 105mm³

Volume of component + Volume of overflow and feed system

(V_t) = V x (1 + c/100) = 9.828 x 105 x (1 + 40/100)

= 1372920 mm³

C. Plunger Diameter Calculation

Actual shot volume = V_t + πd²h/4

Where h is biscuit thickness and d is the plunger diameter

Stroke length for 800 T machine (l) = 750 mm

Effective stroke length (L) = l – biscuit thickness

= 640 – 63 + 15 = 592mm

Assume fill ratio = 0.50

Volume delivered by machine = πd² x (L/4) x f

i.e. V_t + π d² x (h/4) = πd² x (L/4) x f = πd² x (592/4) x 0.50

V_t = π/4 x d² (L x f - 15) = π/4 x d² (592 x 0.5 - 15) 1372920 = 221 d²

D = 80 mm

Available plunger sizes in 800 T machines are 80,85,90,95,100 mm

Hence we can select 90 mm plunger tip

Shot volume = V_t + πd²h/4 = 1372920 + π (90)² x 15/4mm³ = 1372920 + 95425.87 = 1468345.877 mm³

Shot weight = Shot volume x density = 1468345.877 x 2.5 x 10⁻³ = 3670.086g = 3.67kg

From machine manual, for 800T machine, shot weight capacity for 90 mmplunger is 9.2 kg. Hence according to shot capacity also 800T machine is suitable.

D. Fill Ratio Calculation

Fill ratio (f) = Metal volume/Shot sleeve volume

= V_t + π d²h/4 / π d² x (L/4)

= 1468345.877 / π (90)² x (592/4) = 0.39

This value for fill ratio is acceptable for the process.

E. Fill Time Calculation

$$\text{Fill Time} = k [T_i - T_f + sz] T / [T_f - T_d]$$

Where k, empirically derived constant = 0.0346,

T_i, Temperature of molten metal as it enters the die = 6400c

T_f, Minimum flow temperature of metal = 5800c

T_d, Temperature of die cavity surface just before the metal enters = 2000c

S, percent solid fraction allowable in the metal at the end of filling = 30%

Z, Units conversion factor = 4.8

T, casting thickness = 2.50mm

$$\text{Therefore } t = 0.0346[640 - 580 + 30 \times 4.8] \times 2.5 [580 - 200]$$

$$t = 0.046 \text{ seconds} = 46 \text{ milli seconds}$$

III. PRO-E MANUFACTURING (MOLD EXTRACTION)

A die is usually made in two halves and when closed it forms a cavity similar to the casting desired. One half of the die that remains stationary is known as cover die and the other movable half is called “ejector die”.



Molds separate into at least two halves (called the core and the cavity) to permit the part to be extracted. In general the shape of a part must not cause it to be locked into the mold. For example, sides of objects typically cannot be parallel with the direction of draw (the direction in which the core and cavity separate from each other). They are angled slightly (draft), and examination of most plastic household objects will reveal this. Parts that are "bucket-like" tend to shrink onto the core while cooling, and after the cavity is pulled away. Pins are the most popular method of removal from the core, but air ejection, and stripper plates can also be used depending on the application.

Core: The core which is the male portion of the mold forms the internal shape of the molding.


Cavity: The cavity which is the female portion of the mold, gives the molding its external form.

IV. 3D MODEL AND 2D DRAWING OF DIFFERENT PARTS


Cylinder Head

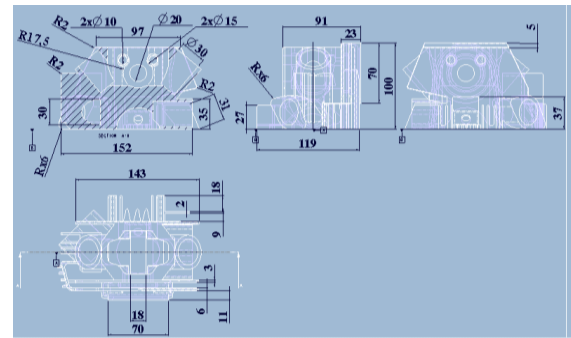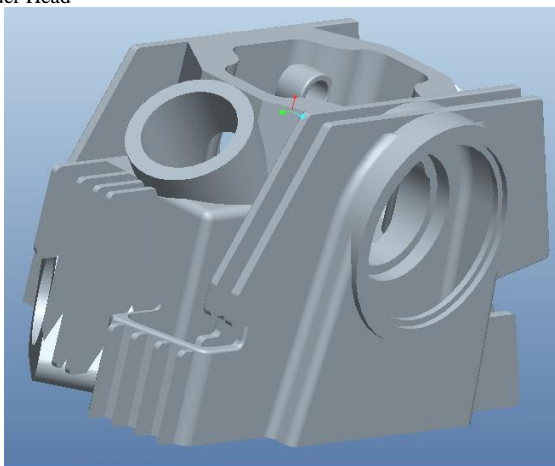


Core Cavity Preparation of Model

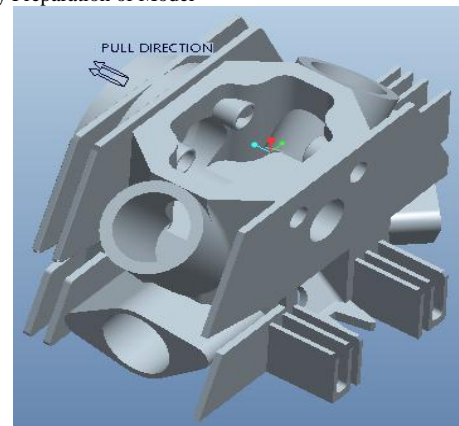



Workpiece

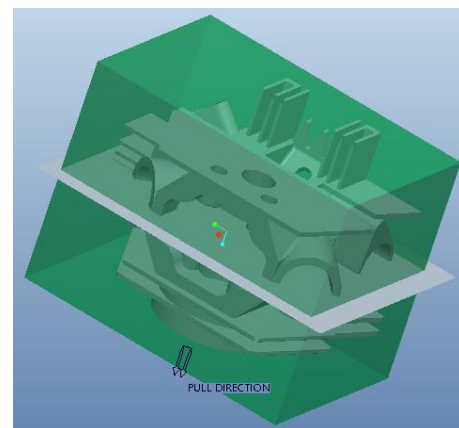


Parting Surface

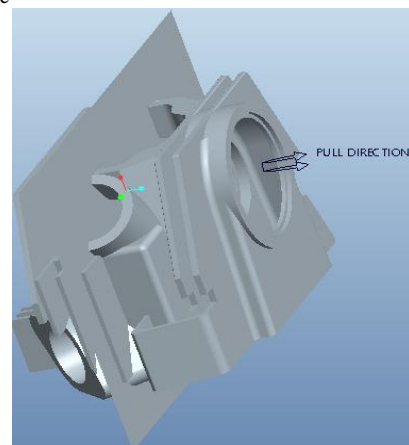


Exploded View

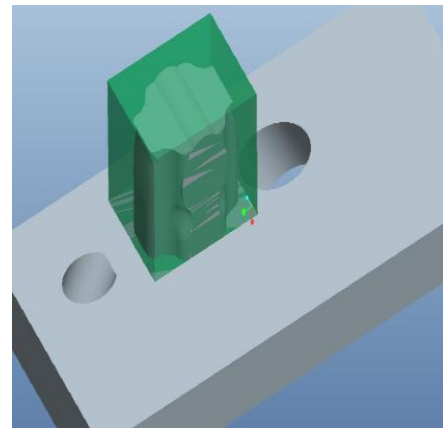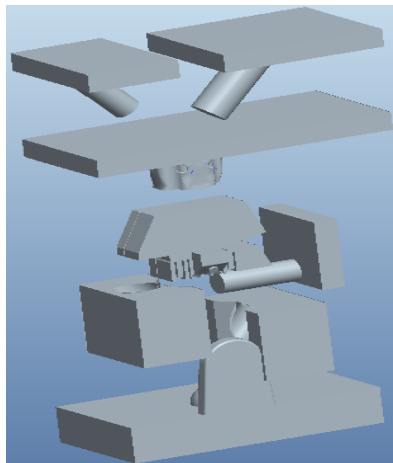


Play Path

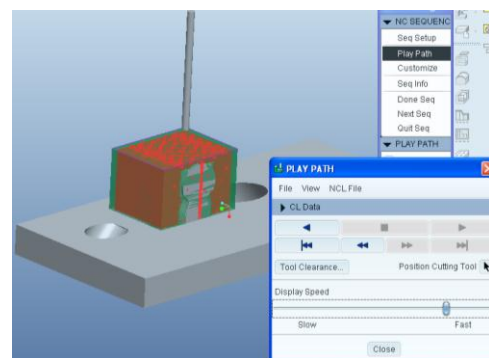

2D-Drawing

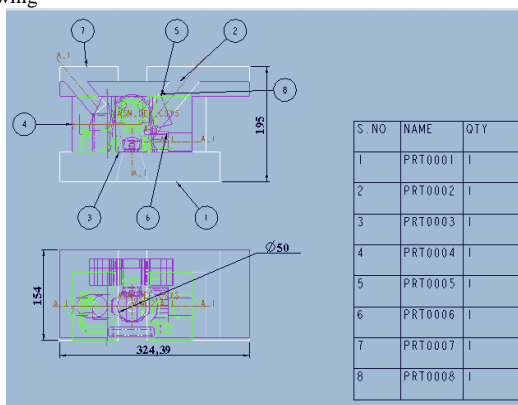

Vericut

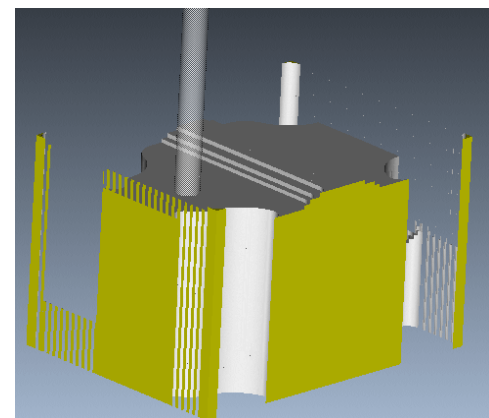

V. COMPUTER AIDED MANUFACTURING IN PRO/ENGINEER

By using the fundamental abilities of the software with regards to the single data source principle, it provided a rich set of tools in the manufacturing environment in the form of tooling design and simulated CNC machining and output.

Tooling options cover specialty tools for molding, die-casting and progressive tooling design. Manufacturing lets you set up and run NC machines, create assembly process sequences, create bills of material, and generate inspection programs for Coordinate Measuring Machines (CMMs).

Use the Manufacturing area is about streamlining the NC programming process for production milling of prismatic parts and multisurface three-axis milling. Manufacturing shows you how to program and set up your NC machines, create process flows that cover the NC operations as well as other operations, and define CMM inspection programs that probe manufactured parts.

A. Procedure of Manufacturing Coreroughing Workpiece

Roughing Program

```


%
G71
O0001
(D:\cyl_head\seq00011.ncl.1)
N0010T1M06
S2500M03
G00X-3.Y-3.
G43Z0.H01M08
G01Z-1.F350.
X-114.43
Y-3.989
X-3.
Y-4.978
X-114.43
    
```

Y-5.967	G02X-51.17Y-43.768I-5.544J2.313
X-3.	G01X-61.29
Y-6.956	G03X-60.56Y-44.693I5.06J3.238
X-114.43	G01X-51.9
Y-7.946	G02X-53.037Y-45.618I-4.33J4.163
X-3.	G01X-59.423
Y-8.935	G03X-59.423Y-45.618I3.193J5.088
X-114.43	G01Z-100.
Y-9.924	X-53.037
X-3.	G03X-51.9Y-44.693I-3.193J5.088
Y-10.913	G01X-60.56
X-114.43	G02X-61.29Y-43.768I4.33J4.163
Y-11.902	G01X-51.17
X-3.	G03X-50.686Y-42.843I-5.06J3.238
Y-12.891	G01X-61.774
X-114.43	G02X-62.074Y-41.918I5.544J2.313
Y-13.88	G01X-50.386
X-3.	G03X-50.241Y-40.993I-5.844J1.388
Y-14.869	G01X-62.219
X-114.43	X-62.237Y-40.53
Y-15.858	X-62.219Y-40.067
X-3.	X-50.241
Y-16.847	G03X-50.386Y-39.142I-5.989J-.463
X-114.43	G01X-62.074
Y-17.837	G02X-61.774Y-38.217I5.844J-1.388
X-3.	G01X-50.686
Y-18.826	G03X-51.17Y-37.292I-5.544J-2.313
X-114.43	G01X-61.29
Y-19.815	G02X-60.56Y-36.367I5.06J-3.238
X-3.	G01X-51.9
Y-20.804	G03X-53.037Y-35.442I-4.33J-4.163
X-114.43	G01X-59.423
Y-21.793	G03X-59.423Y-35.442I3.193J-5.088
X-3.	G01Z-101.
Y-22.782	X-53.037
X-114.43	G02X-51.899Y-36.367I-3.193J-5.088
Y-23.771	G01X-60.56
X-3.	G03X-61.29Y-37.292I4.33J-4.163
Y-24.76	G01X-51.17
X-114.43	G02X-50.686Y-38.217I-5.06J-3.238
Y-25.749	G01X-61.774
X-3.	G03X-62.074Y-39.142I5.544J-2.313
Y-26.738	G01X-50.386
X-114.43	G02X-50.241Y-40.067I-5.844J-1.388
Y-27.728	G01X-62.219
X-3.	X-62.237Y-40.53
Y-28.717	X-62.219Y-40.993
X-114.43	X-50.241
Y-29.706	G02X-50.386Y-41.918I-5.989J.463
X-3.	G01X-62.074
Y-30.695	G03X-61.774Y-42.843I5.844J1.388
X-114.43	G01X-50.686
Y-31.684	G02X-51.17Y-43.768I-5.544J2.313
X-3.	G01X-61.29
Y-32.673	G03X-60.56Y-44.693I5.06J3.238
G01X-62.074	G01X-51.9
G03X-61.774Y-42.843I5.844J1.388	G02X-53.037Y-45.618I-4.33J4.163
G01X-50.686	G01X-59.423

G03X-59.423Y-45.618I3.193J5.088
 G01Z0.
 M30
 %
 %
 G71
 O0002
 X-35.01Y-26.017Z-3.885
 X-34.648Y-26.082Z-3.966
 X-34.592Y-26.071Z-3.98
 X-34.718Y-25.952Z-3.949
 X-35.372Y-25.951Z-3.812
 X-35.01Y-26.017Z-3.885
 X-34.956Y-26.052Z-3.896
 X-34.911Y-26.108Z-3.905
 X-34.857Y-26.144Z-3.916
 X-34.648Y-26.184Z-3.966
 X-34.383Y-26.131Z-4.03
 X-34.678Y-25.852Z-3.959
 X-35.519Y-25.851Z-3.782
 X-36.162Z-3.677
 X-36.863Y-25.85Z-3.592
 X-36.162Y-25.94Z-3.677
 X-35.752Y-25.992Z-3.744
 X-35.519Y-26.033Z-3.782
 X-34.857Y-26.144Z-3.916
 Z-3.5
 G00X-43.269Y-25.847
 G01Z-3.598
 X-43.253Z-3.697
 X-43.743Z-3.776
 X-43.637Y-25.961Z-3.759
 X-43.134Y-25.895Z-3.677
 X-42.764Y-25.847Z-3.631
 X-43.134Z-3.677
 X-43.253Z-3.697
 Z0.
 G00X-40.618Y-25.795
 Z-3.3
 G01Z-3.5
 X-39.083
 X-38.042Y-25.858Z-3.511
 X-37.425Y-25.901Z-3.543
 X-36.798Y-25.968Z-3.598
 X-36.094Y-26.044Z-3.689
 X-35.519Y-26.14Z-3.782
 X-34.87Y-26.249Z-3.913
 X-34.648Y-26.286Z-3.966
 X-34.174Y-26.192Z-4.083
 X-34.638Y-25.752Z-3.969
 X-34.87Z-3.913
 X-35.519Y-25.751Z-3.782
 X-36.162Z-3.677
 X-36.798Y-25.75Z-3.598
 X-37.425Y-25.749Z-3.543
 X-38.374Y-25.748Z-3.502
 X-41.116Y-25.747Z-3.506
 X-41.872Z-3.543
 X-42.499Z-3.598
 X-43.134Z-3.677
 X-43.973Z-3.821
 X-43.674Y-26.067Z-3.765
 X-43.134Y-26.003Z-3.677
 X-42.499Y-25.927Z-3.598
 X-42.15Y-25.885Z-3.567
 X-41.366Y-25.839Z-3.515
 X-40.618Y-25.795Z-3.5
 X-40.557Y-25.819
 X-40.502Y-25.866
 X-40.442Y-25.89
 X-39.099Y-25.895
 X-38.042Y-25.958Z-3.511
 X-37.425Y-26.001Z-3.543
 X-36.798Y-26.069Z-3.598
 X-36.098Y-26.144Z-3.688
 X-35.519Y-26.242Z-3.782
 X-34.87Y-26.351Z-3.913
 X-34.648Y-26.388Z-3.966
 X-34.022Y-26.263Z-4.125
 X-33.962Y-26.254Z-4.142
 X-34.598Y-25.652Z-3.978
 X-34.87Z-3.913
 X-35.519Y-25.651Z-3.782
 X-36.162Z-3.677
 X-36.798Y-25.65Z-3.598
 X-37.425Y-25.649Z-3.543
 X-38.374Y-25.648Z-3.502
 X-41.116Y-25.647Z-3.5067.701
 X-58.809Y-47.657
 X-58.851Y-47.574
 X-58.904Y-47.466
 X-59.014Y-47.228
 X-59.091Y-47.048
 X-59.353Y-46.444
 Z-5.9
 G00X-47.661Y-49.499
 Z-50.875
 G01Z-50.975
 X-47.622Y-49.494
 X-47.297Y-49.467
 X-46.808Y-49.432
 X-46.317Y-49.406
 X-45.825Y-49.387
 X-45.331Y-49.374
 X-44.844Y-49.366
 X-44.349Y-49.363
 X-43.853Y-49.364
 X-42.9Y-49.371
 X-42.398Y-49.377
 X-39.907Y-49.411
 X-38.899Y-49.402
 X-37.901Y-49.391
 X-37.188Y-49.381
 X-37.024Y-49.379
 X-36.397Y-49.371
 X-35.895Y-49.367

X-35.865
 X-35.444Y-49.364
 X-34.948Y-49.363
 X-34.453Y-49.366
 X-33.965Y-49.374
 X-33.472Y-49.387
 X-32.98Y-49.406
 X-32.489Y-49.433
 X-32.Y-49.467
 X-31.675Y-49.495
 X-31.637Y-49.499
 Z0.
 M30
 %

Finishing

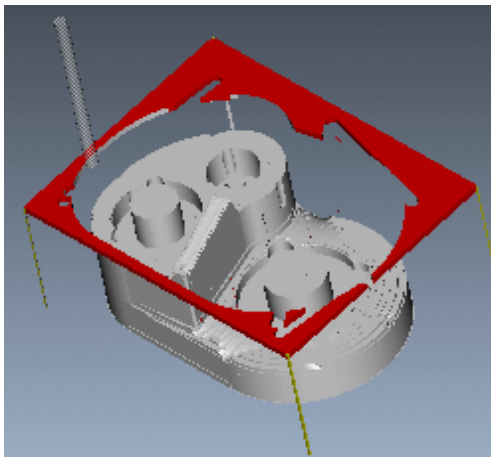

Finishing Program

%
 G71
 O0002
 (D:\cyl_head\finishing.ncl.1)
 N0010T1M06
 S5000M03
 G00X5.Y-5.
 G43Z0.H01
 G01Z-5.F200.
 X201.177
 Y-9.914
 X5.
 Y-14.828
 X201.177
 Y-19.742
 X5.
 Y-24.656
 X201.177
 Y-29.57
 X5.
 Y-34.484
 X201.177
 Y-39.398
 X5.
 Y-44.313


X201.177
 Y-49.227
 X5.
 Y-54.141
 X201.177
 Y-59.055
 X5.
 Y-63.969
 X201.177
 Y-68.883
 X5.
 Y-73.797
 X201.177
 Y-78.711
 X5.
 Y-83.625
 X201.177
 Y-88.539
 X5.
 Y-93.453
 X201.177
 Y-98.367
 X5.
 Y-103.281
 X201.177
 Y-108.195
 X5.
 Y-113.109
 X201.177
 Y-118.023
 X5.
 Y-122.938
 X201.177
 Y-127.852
 X5.
 Y-132.766
 X201.177
 Y-137.68
 X173.448Y-240.428
 X173.393Y-240.471
 X172.567Y-241.146
 X171.566Y-241.929
 X171.257Y-242.156
 X170.921Y-242.407
 X169.708Y-243.274
 X169.497Y-243.418
 X169.385Y-243.491
 X168.471Y-244.105
 X167.569Y-244.679
 X167.445Y-244.76
 X165.457Y-245.938
 X165.352Y-245.998
 X165.199Y-246.08
 X164.15Y-246.655
 X163.227Y-247.13
 X163.125Y-247.178
 X162.823Y-247.333
 X161.476Y-247.971

X161.273Y-248.061
 X161.075Y-248.156
 X160.321Y-248.476
 X160.11Y-248.568
 X159.609Y-248.786
 X158.905Y-249.076
 X158.652Y-249.171
 X158.226Y-249.343
 X156.827Y-249.858
 X155.413Y-250.331
 X154.539Y-250.604
 X154.151Y-250.712
 X153.459Y-250.91
 X152.357Y-251.214
 X152.152Y-251.263
 X150.568Y-251.644
 X150.182Y-251.726
 X150.005Y-251.76
 X149.107Y-251.946
 X148.334Y-252.082
 X148.21Y-252.117
 X147.494Y-252.231
 X145.43Y-252.546
 X144.888Y-252.621
 Z0.
 M30
 %


B. Procedure of Manufacturing

Cavity


Roughing

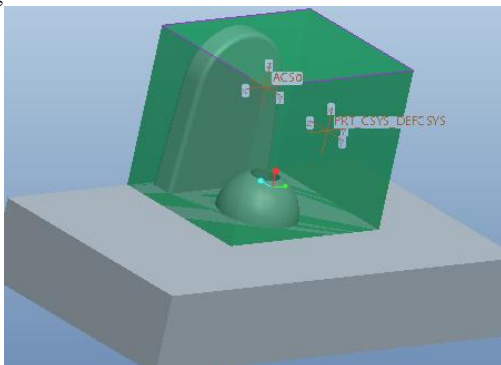

Play Path

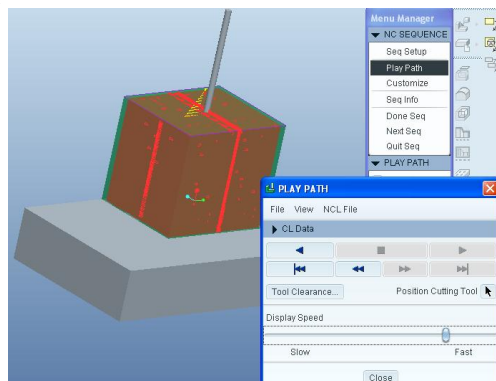

Vericut

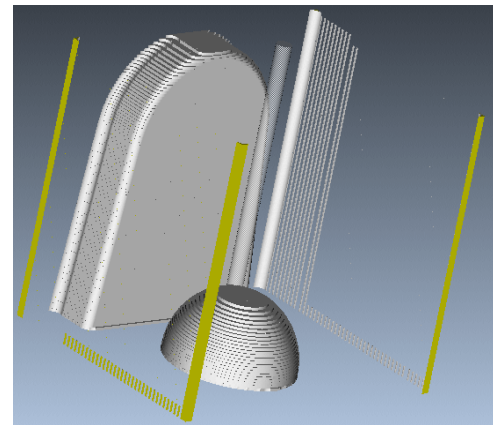


Roughing Program

```
%
G71
O0001
(D:\cyl_head\seq00011.ncl.1)
N0010T1M06
S2500M03
G00X-3.Y-3.
G43Z0.H01M08
G01Z-1.F350.
X-114.43
Y-3.989
X-3.
Y-4.978
X-114.43
Y-5.967
X-3.
Y-6.956
X-114.43
Y-7.946
X-3.
Y-8.935
X-114.43
Y-9.924
X-3.
Y-10.913
X-114.43
Y-11.902
X-3.
Y-12.891
X-114.43
Y-13.88
X-3.
Y-14.869
X-114.43
Y-15.858
X-3.
Y-16.847
X-114.43
Y-17.837
X-3.
Y-18.826
```

X-114.43
 Y-19.815
 X-3.
 Y-20.804
 X-114.43
 Y-21.793
 X-3.
 Y-22.782
 X-114.43
 Y-23.771
 X-3.
 Y-24.76
 X-114.43
 Y-25.749
 X-3.
 G01X-60.56
 G03X-61.29Y-37.292I4.33J-4.163
 G01X-51.17
 G02X-50.686Y-38.217I-5.06J-3.238
 G01X-61.774
 G03X-62.074Y-39.142I5.544J-2.313
 G01X-50.386
 G02X-50.241Y-40.067I-5.844J-1.388
 G01X-62.219
 X-62.237Y-40.53
 X-62.219Y-40.993
 X-50.241
 G02X-50.386Y-41.918I-5.989J.463
 G01X-62.074
 G03X-61.774Y-42.843I5.844J1.388
 G01X-50.686
 G02X-51.17Y-43.768I-5.544J2.313
 G01X-61.29
 G03X-60.56Y-44.693I5.06J3.238
 G01X-51.9
 G02X-53.037Y-45.618I-4.33J4.163
 G01X-59.423
 G03X-59.423Y-45.618I3.193J5.088
 G01Z-100.
 X-53.037
 G03X-51.9Y-44.693I-3.193J5.088
 G01X-60.56
 G02X-61.29Y-43.768I4.33J4.163
 G01X-51.17
 G03X-50.686Y-42.843I-5.06J3.238
 G01X-61.774
 G02X-62.074Y-41.918I5.544J2.313
 G01X-50.386
 G03X-50.241Y-40.993I-5.844J1.388
 G01X-62.219
 X-62.237Y-40.53
 X-62.219Y-40.067
 X-50.241
 G03X-50.386Y-39.142I-5.989J-.463
 G01X-62.074
 G02X-61.774Y-38.217I5.844J-1.388
 G01X-50.686
 G03X-51.17Y-37.292I-5.544J-2.313

G01X-61.29
 G02X-60.56Y-36.367I5.06J-3.238
 G01X-51.9
 G03X-53.037Y-35.442I-4.33J-4.163
 G01X-59.423
 G03X-59.423Y-35.442I3.193J-5.088
 G01Z-101.
 X-53.037
 G02X-51.899Y-36.367I-3.193J-5.088
 G01X-60.56
 G03X-61.29Y-37.292I4.33J-4.163
 G01X-51.17
 G02X-50.686Y-38.217I-5.06J-3.238
 G01X-61.774
 G03X-62.074Y-39.142I5.544J-2.313
 G01X-50.386
 G02X-50.241Y-40.067I-5.844J-1.388
 G01X-62.219
 X-62.237Y-40.53
 X-62.219Y-40.993
 X-50.241
 G02X-50.386Y-41.918I-5.989J.463
 G01X-62.074
 G03X-61.774Y-42.843I5.844J1.388
 G01X-50.686
 G02X-51.17Y-43.768I-5.544J2.313
 G01X-61.29
 G03X-60.56Y-44.693I5.06J3.238
 G01X-51.9
 G02X-53.037Y-45.618I-4.33J4.163
 G01X-59.423
 G03X-59.423Y-45.618I3.193J5.088
 G01Z0.
 M30
 %

Finishing

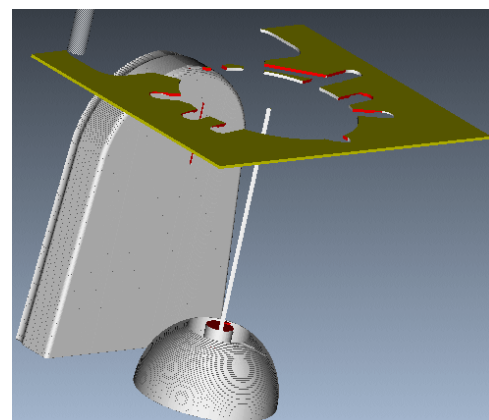

Finishing Program

%
 G71
 O0002
 (D:\cyl_head\seq00020.ncl.1)
 (03/20/12-15:37:19)

N0010T1M06
S3570M03
G00X-52.638Y-83.468
G43Z0.H01M08
Z-2.317
G01Z-2.567F250.
X-52.668Z-3.067
X-53.112Y-83.47Z-3.04
X-54.352Y-83.453Z-3.002
X-58.344Y-83.458Z-3.006
X-59.088Y-83.466Z-3.028
X-59.831Y-83.479Z-3.067
X-60.571Y-83.493Z-3.123
X-61.31Y-83.507Z-3.195
X-62.046Y-83.52Z-3.283
X-62.783Y-83.534Z-3.389
X-63.506Y-83.551Z-3.51
X-64.23Y-83.567Z-3.647
X-64.949Y-83.584Z-3.799
X-65.663Y-83.601Z-3.968
X-66.371Y-83.624Z-4.151
X-67.072Y-83.659Z-4.35
X-67.766Y-83.693Z-4.563
X-68.453Y-83.728Z-4.791
X-69.463Y-83.778Z-5.159
X-70.466Y-83.855Z-5.557
X-71.12Y-83.905Z-5.838
X-71.764Y-83.955Z-6.133
X-72.796Y-84.034Z-6.642
X-71.764Y-84.13Z-6.133
X-71.027Y-84.199Z-5.798
X-70.466Y-84.235Z-5.557
X-69.804Y-84.277Z-5.288
X-69.132Y-84.313Z-5.033
X-68.453Y-84.314Z-4.791
X-67.766Y-84.316Z-4.563
X-67.072Y-84.317Z-4.35
X-66.371Y-84.318Z-4.151
X-65.663Y-84.319Z-3.968
X-64.949Y-84.321Z-3.799
X-64.23Y-84.322Z-3.647
X-63.506Y-84.323Z-3.51
X-62.778Y-84.325Z-3.388
X-62.046Y-84.326Z-3.283
X-61.31Y-84.327Z-3.195
X-60.571Y-84.329Z-3.123
X-59.831Y-84.33Z-3.067
X-58.592Y-84.332Z-3.011
X-57.765Y-84.334Z-3.
X-54.104Y-84.332Z-3.006
X-53.112Y-84.331Z-3.04
X-52.369Y-84.329Z-3.085
X-51.628Y-84.328Z-3.146
X-50.889Y-84.327Z-3.224
X-50.153Y-84.326Z-3.319
X-49.42Y-84.324Z-3.43
X-48.692Y-84.323Z-3.557
X-47.967Y-84.322Z-3.7
X-47.248Y-84.321Z-3.859
X-46.534Y-84.319Z-4.034
X-45.826Y-84.318Z-4.224
X-45.124Y-84.317Z-4.429
X-44.429Y-84.316Z-4.649
X-43.465Y-84.314Z-4.984
X-42.361Y-84.275Z-5.406
X-41.727Y-84.214Z-5.67
X-40.985Y-84.145Z-6.
X-40.278Y-84.098Z-6.334
X-39.573Y-84.036Z-6.689
X-40.428Y-83.956Z-6.26
X-41.073Y-83.896Z-5.959
X-41.727Y-83.856Z-5.67
X-42.558Y-83.805Z-5.328
X-43.062Y-83.782Z-5.132
X-43.741Y-83.751Z-4.883
X-44.429Y-83.72Z-4.649
X-45.124Y-83.689Z-4.429
X-45.826Y-83.657Z-4.224
X-46.6Y-83.622Z-4.018
X-47.248Y-83.603Z-3.859
X-47.967Y-83.582Z-3.7
X-48.692Y-83.56Z-3.557
X-49.42Y-83.539Z-3.43
X-61.433Y-74.529
X-61.01Y-74.53
X-51.325
X-50.7Y-74.529
X-50.69Y-74.53
X-48.968
X-48.459Y-74.529
X-48.454Y-74.53
X-47.237
X-46.76Y-74.529
X-46.742Y-74.53
X-45.802
X-45.348Y-74.529
X-45.336Y-74.53
X-44.561
X-44.126Y-74.529
X-44.116Y-74.53
X-43.456
X-43.034Y-74.529
X-43.014Y-74.53
X-42.448
X-42.038Y-74.529
X-42.031Y-74.53
X-41.538
X-41.129Y-74.529
X-41.116Y-74.53
X-40.7
X-40.3Y-74.529
X-40.295Y-74.53
X-39.905
X-39.514Y-74.529
X-39.507Y-74.53
X-39.172

X-38.781Y-74.529
X-38.507Y-74.53
X-38.483
X-38.099Y-74.529
X-38.092Y-74.53
X-37.821
X-37.437Y-74.529
X-37.431Y-74.53
X-37.213
X-36.836Y-74.529
X-36.829Y-74.53
X-36.615
X-36.243Y-74.529
X-36.236Y-74.53
X-36.071
X-35.699Y-74.529
X-35.66Y-74.53
X-35.53
X-35.163Y-74.529
X-35.152Y-74.53
X-35.036
X-34.669Y-74.529
X-34.66Y-74.53
X-34.542
X-34.18Y-74.529
X-34.169Y-74.53
X-34.093
X-33.732Y-74.529
X-33.695Y-74.53
X-33.645
X-33.283Y-74.529
X-33.271Y-74.53
X-33.232
X-32.875Y-74.529
X-32.864Y-74.53
X-32.825
X-32.468Y-74.529
X-32.442Y-74.53
X-32.089Y-74.529
X-32.074Y-74.53
X-20.693Y-74.529
X-20.588Y-74.551
X-20.123Y-74.589

X-19.377Y-74.777
X-18.646Y-75.104
X-18.131Y-75.44
X-17.662Y-75.846
X-17.254Y-76.314
X-16.917Y-76.827
X-16.588Y-77.557
X-16.399Y-78.303
X-16.366Y-78.711
X-16.331Y-79.03
X-16.34Y-79.112
Y-88.948
X-16.331Y-89.03
X-16.399Y-89.757
X-16.588Y-90.503
X-16.917Y-91.233
X-17.254Y-91.746
X-17.662Y-92.214
X-18.027Y-92.53
Z0.
M30
%

VI. CONCLUSION

In this paper we have designed a cylinder head in 3D modelling software Pro/Engineer, die for the manufacturing of cylinder head and also die calculations of cylinder head. We have to select 800T capacity machine for the die.

We have prepared total die for the manufacturing of cylinder head and generated CNC programming for the core and cavity. We conclude that the cylinder head is ready for manufacturing.

REFERENCES

- [1] A Textbook of Machine Design by R. S. Khurmi and J. K. Gupta
- [2] Engineering fundamentals of the internal combustion engine by Willard W. Pulkrabek
- [3] Mechanical Engineering Design by Budynas–Nisbet
- [4] Manufacturing Process for Engineering Materials, 5th Edition by J. Mater
- [5] Automotive Engineering by Patric GRANT.
- [6] Handbook of mechanical engineering - modern manufacturing by Ed. Frank Kreith
- [7] Automotive. Production.Systems. and. Standardisation by Werner.